

The background features a repeating pattern of dark grey hexagons with thin, glowing orange outlines. A solid orange horizontal band is positioned in the center of the image, containing the text. The hexagons are arranged in a staggered grid, creating a 3D effect with shadows.

Flutlichtstrahler



81-5246



81-5247



81-5248




Art.Nr.	W	V	K	mittl. LD	Lm	Winkel	L x B mm	H mm
81-5246	100 W	230 V	5.000 K	50.000 h	12.000 lm	110°	280 x 243	41
81-5247	150 W	230 V	5.000 K	50.000 h	18.000 lm	110°	352 x 294	51
81-5248	200 W	230 V	5.000 K	50.000 h	24.000 lm	110°	400 x 346	51

- witterungsbeständiges Aluminium-Druckguss Gehäuse, schwarz
- Abdeckung aus gehärtetem Glas
- Verschraubung aus Edelstahl
- verstellbarer Montagebügel
- inkl. 50 cm H05RN-F 3G0.75 mm Anschlussleitung
- inkl. ENEC zertifiziertem LED-Konverter, austauschbar



81-5246

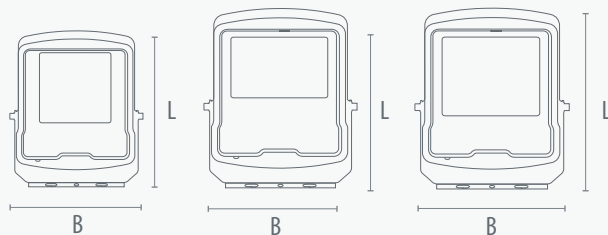

81-5246

81-5247

81-5248



81-5247




81-5248

LED FLUTLICHTSTRAHLER EVO

NEU



81-5240 81-5241



81-5242 81-5243



81-5244 81-5245



Art.Nr.	W	V	K	mittl. LD	Lm	Winkel	EEK	L x Bmm	H mm
81-5240	30 W	230 V	3.000 K	50.000 h	3.300 lm	110°	E	125 x 110	34
81-5241	30 W	230 V	5.000 K	50.000 h	3.600 lm	110°	E	125 x 110	34
81-5242	50 W	230 V	3.000 K	50.000 h	5.500 lm	110°	E	160 x 139	44
81-5243	50 W	230 V	5.000 K	50.000 h	6.000 lm	110°	E	160 x 139	44
81-5244	70 W	230 V	3.000 K	50.000 h	7.700 lm	110°	E	220 x 194	48
81-5245	70 W	230 V	5.000 K	50.000 h	8.400 lm	110°	E	220 x 194	48

- witterungsbeständiges Aluminium-Druckguss Gehäuse, schwarz
- Abdeckung aus gehärtetem Glas
- Verschraubung aus Edelstahl
- verstellbarer Montagebügel
- inkl. 50 cm H05RN-F 3G0.75 mm Anschlussleitung



81-5240



81-5241



81-5242




81-5243



81-5244



81-5245

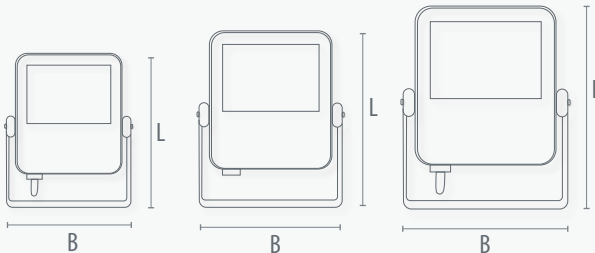

81-5240

81-5241

81-5242

81-5243

81-5244

81-5245